


Intematix Lighting Solutions Line Card

Intematix Ambient Lighting Modules

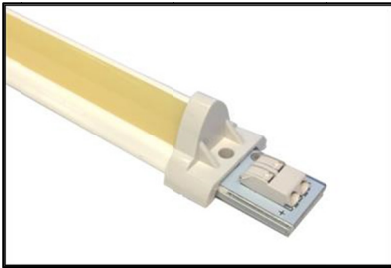


Part Number	Length	CCT (K)	Typ CRI	Typical LOP (lm)	Typical Efficacy (lm/W)	Power (W)
ILM-AL01-030-0900-0305	12 Inch 305 mm	3000	98	830	104	8.0
ILM-AL01-840-1200-0305		4000	82	1160	145	
ILM-AL01-040-0900-0305		4000	96	915	114	
ILM-AL01-030-1600-0508	20 Inch 508 mm	3000	98	1490	104	14.3
ILM-AL01-840-2100-0508		4000	82	2070	145	
ILM-AL01-040-1600-0508		4000	96	1620	113	
ILM-AL01-030-2400-1092	43 Inch 1092 mm	3000	98	2260	105	21.5
ILM-AL01-840-3200-1092		4000	82	3160	145	
ILM-AL01-040-2400-1092		4000	96	2495	116	

Intematix Tunable Lighting Modules



Part Number	Length	CCT (K)	Min CRI	Typical LOP (lm)	Typical Efficacy (lm/W)	Power (W)
ILM-TL01-92750-1600-0280	11 Inch 280 mm	2700	90	1600	129	12.4
		5000	90	1675	135	12.4
ILM-TL01-92750-3200-0560	22 Inch 560 mm	2700	90	3190	129	24.8
		5000	90	3350	135	24.8

Intematix Commercial Lighting Modules

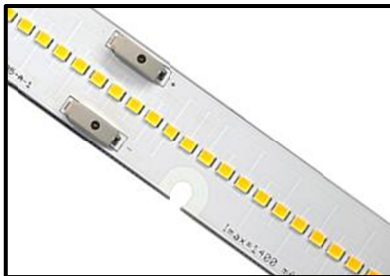

Part Number	Length	CCT (K)	Min CRI	Typical LOP (lm)	Typical Efficacy (lm/W)	Power (W)
ILM-CL01-830-1200-0280	11 Inch 280 mm	3000	80	1195	175	6.8
ILM-CL01-840-1200-0280		4000	80	1230	180	
ILM-CL01-850-1200-0280		5000	80	1230	180	
ILM-CL01-830-2400-0560	22 Inch 560 mm	3000	80	2390	175	13.7
ILM-CL01-840-2400-0560		4000	80	2460	180	
ILM-CL01-850-2400-0560		5000	80	2460	180	
ILM-CL01-830-4800-1120	44 Inch 1120 mm	3000	80	4780	175	27.3
ILM-CL01-840-4800-1120		4000	80	4920	180	
ILM-CL01-850-4800-1120		5000	80	4920	180	

Please contact an Intematix sales representative for additional product details.

For more information contact sales@intematix.com or visit our web site www.intematix.com.

